

WALL - WINDOW - SURFACE - RUGS - FLOOR W2W

Wise is a brand of:



THE FABULOUS GROUP®

[www.wisefloor.com](http://www.wisefloor.com)

# WISE

FABULOUS CHOICES





# WISE<sub>is</sub>

**STRONG** Its durability makes it a good choice for high traffic hotels, apartments, commercial and of course residential applications.

**SOFT** It feels like real textile and provides a soft and comfortable feeling.

**EASY** It is easy to apply. Furthermore it is much easier to clean and maintain than carpets.

**SAFE** It is flame resistant and it has much better anti-slip properties than a wooden or marble floor. It can be used unbacked where appropriate or backed for strength and better anti-slip characteristics, or treated for special applications. The backings can be used to create more durable, flame resistant fabrics with different degrees of breathability. The vinyl's DNA is antibacterial.

**QUIET** It is sound absorbing so you will enjoy the sound of silence at work or rest.

**FRIENDLY** It keeps your place at the desired temperature for a longer time.

**PERFECT** It can be used indoors or outdoors according to your desires.


**FADELESS** It is available in a wide range of colours. Moreover it is solution dyed, meaning that the colour is created in the solution before the fibres are extruded. This provides the ultimate long lasting colour and unsurpassed colour life against fading.

**TAILORED** You can make your own design and colours with a minimum order of 1000 m<sup>2</sup>.

The innovative vinyl floor material designed to make you feel comfortable. The total production process uses low temperatures and nearly zero water. All excess material created during production can be recycled. Because, we care about the environment as much as we care for your convenience.





**WISE is the ideal** woven vinyl fabric floor, that will cover your flooring needs for good! It is the best alternative to traditional carpets, wooden and marble floors, because it offers so much more.

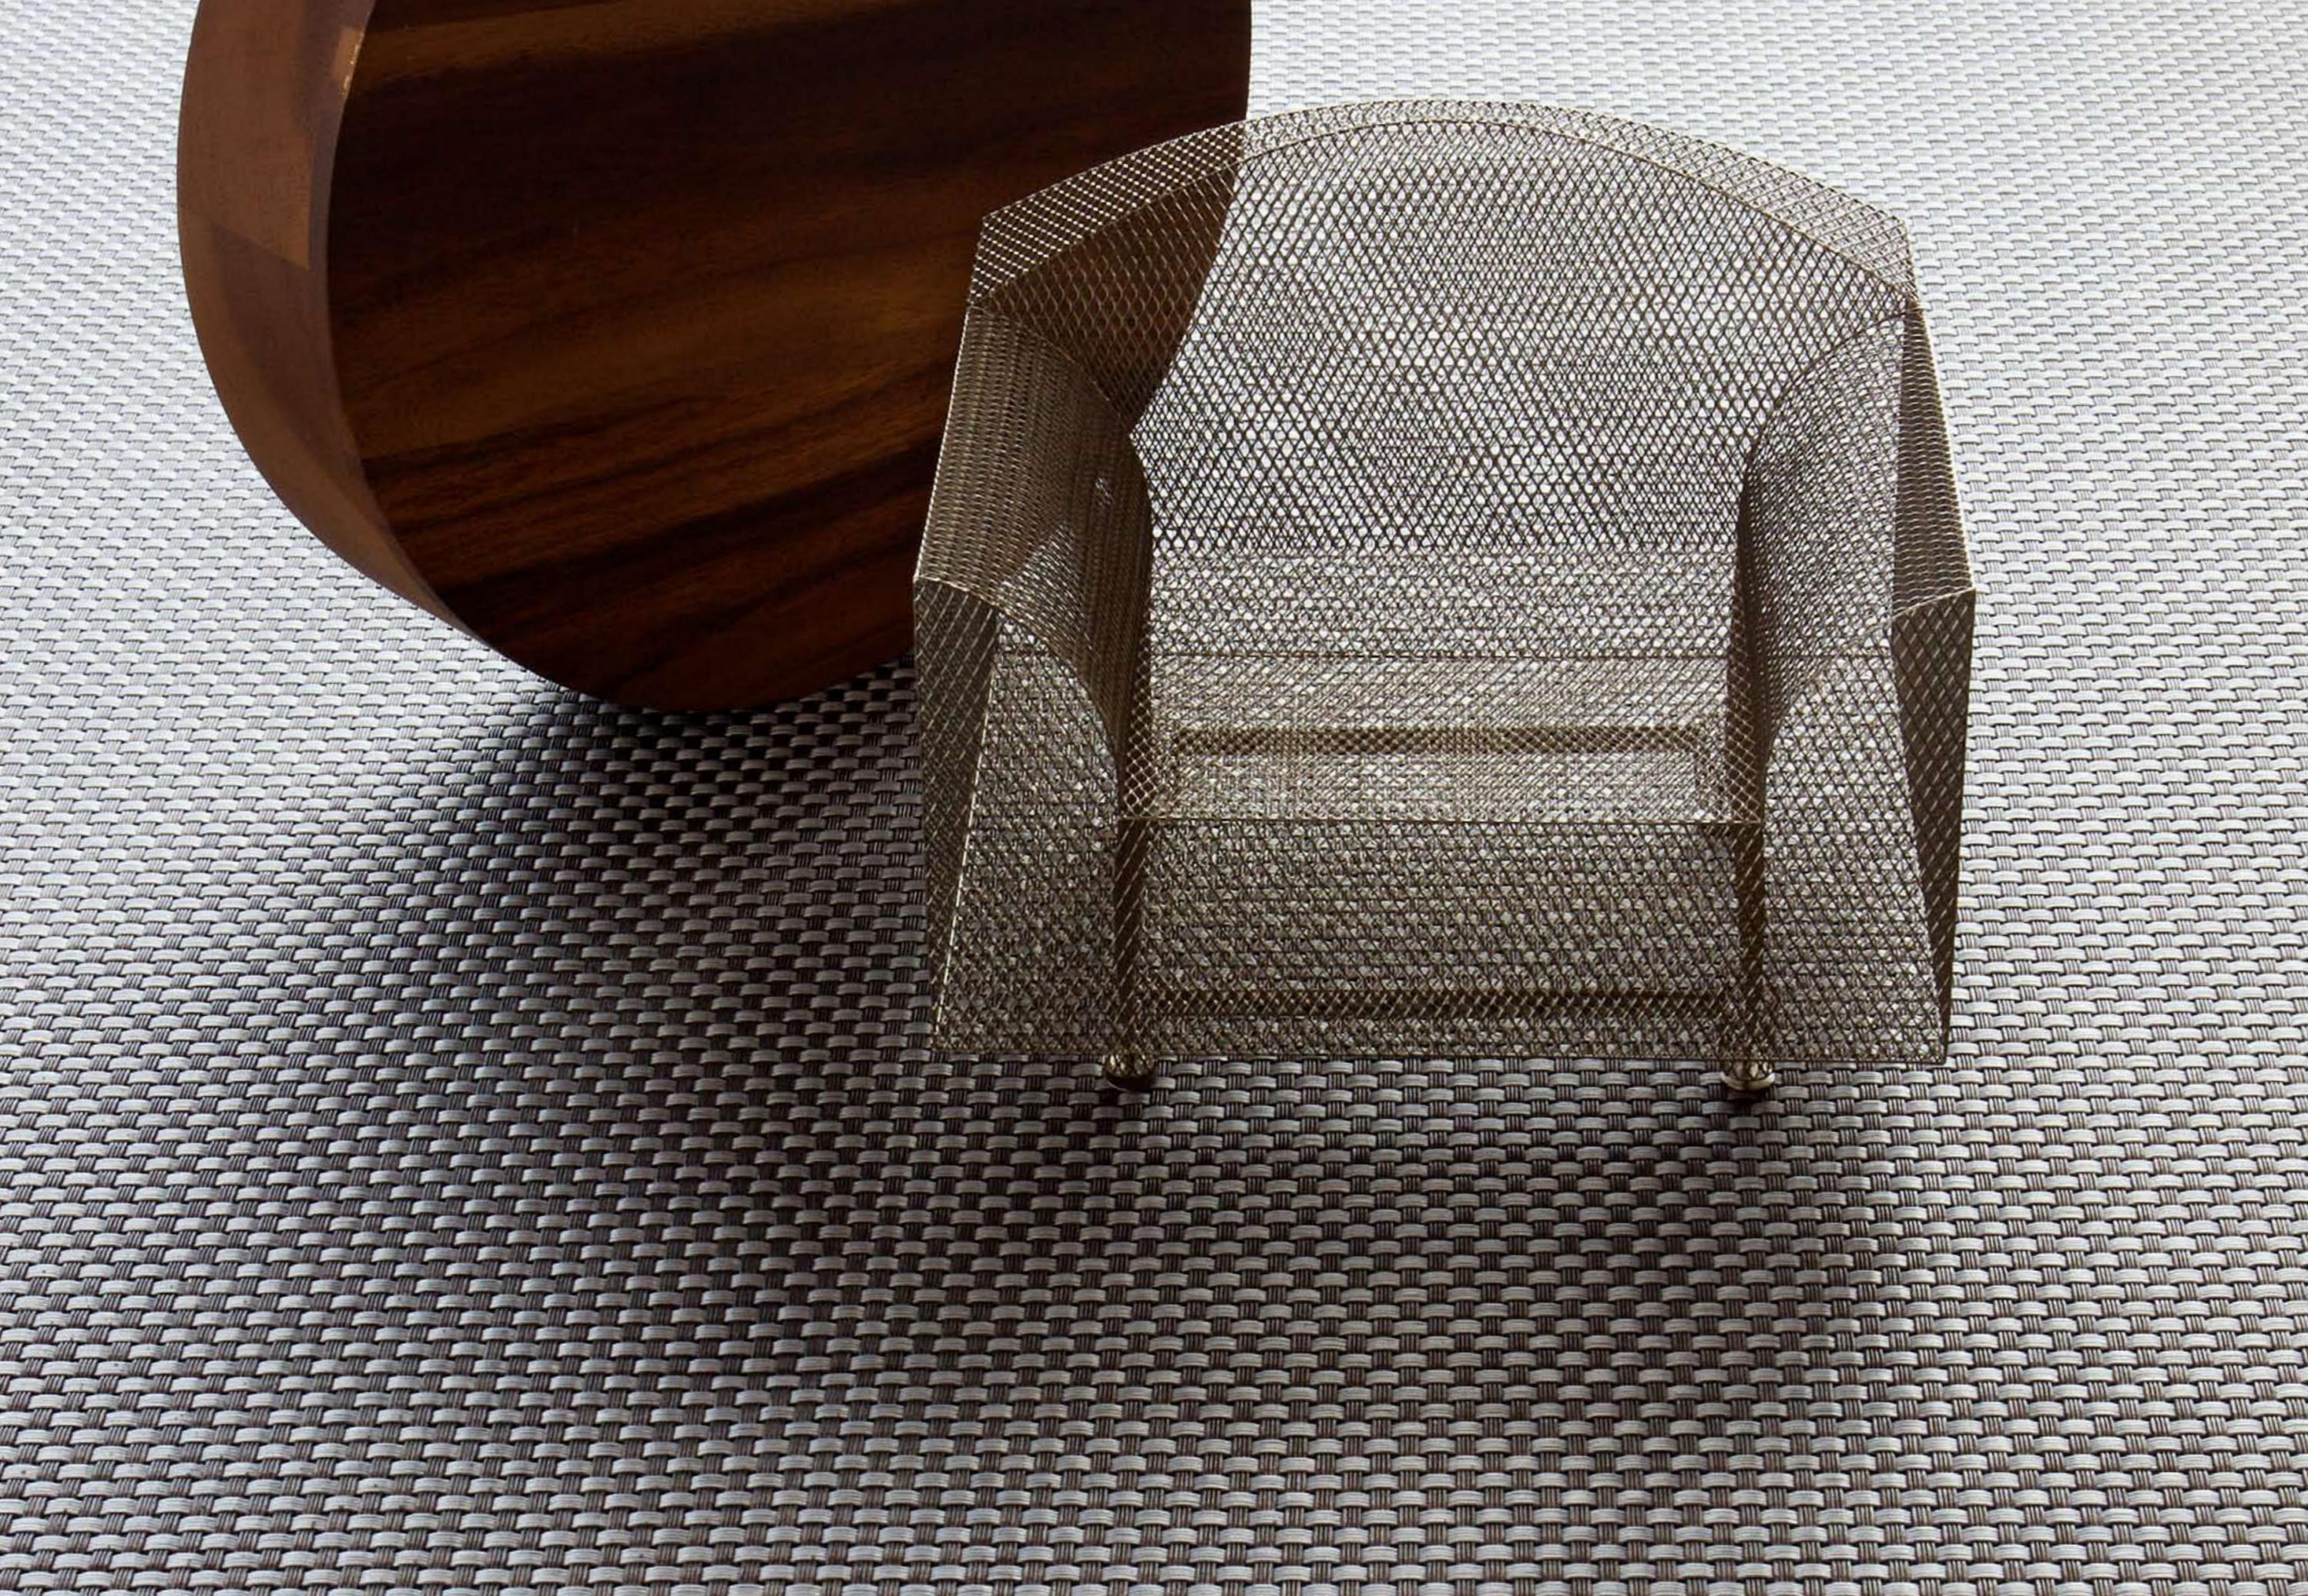


# WISE COLLECTION


WALL - WINDOW - SURFACE - RUGS - FLOOR W2W

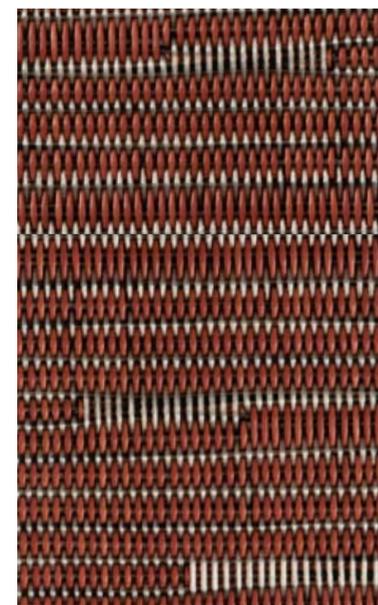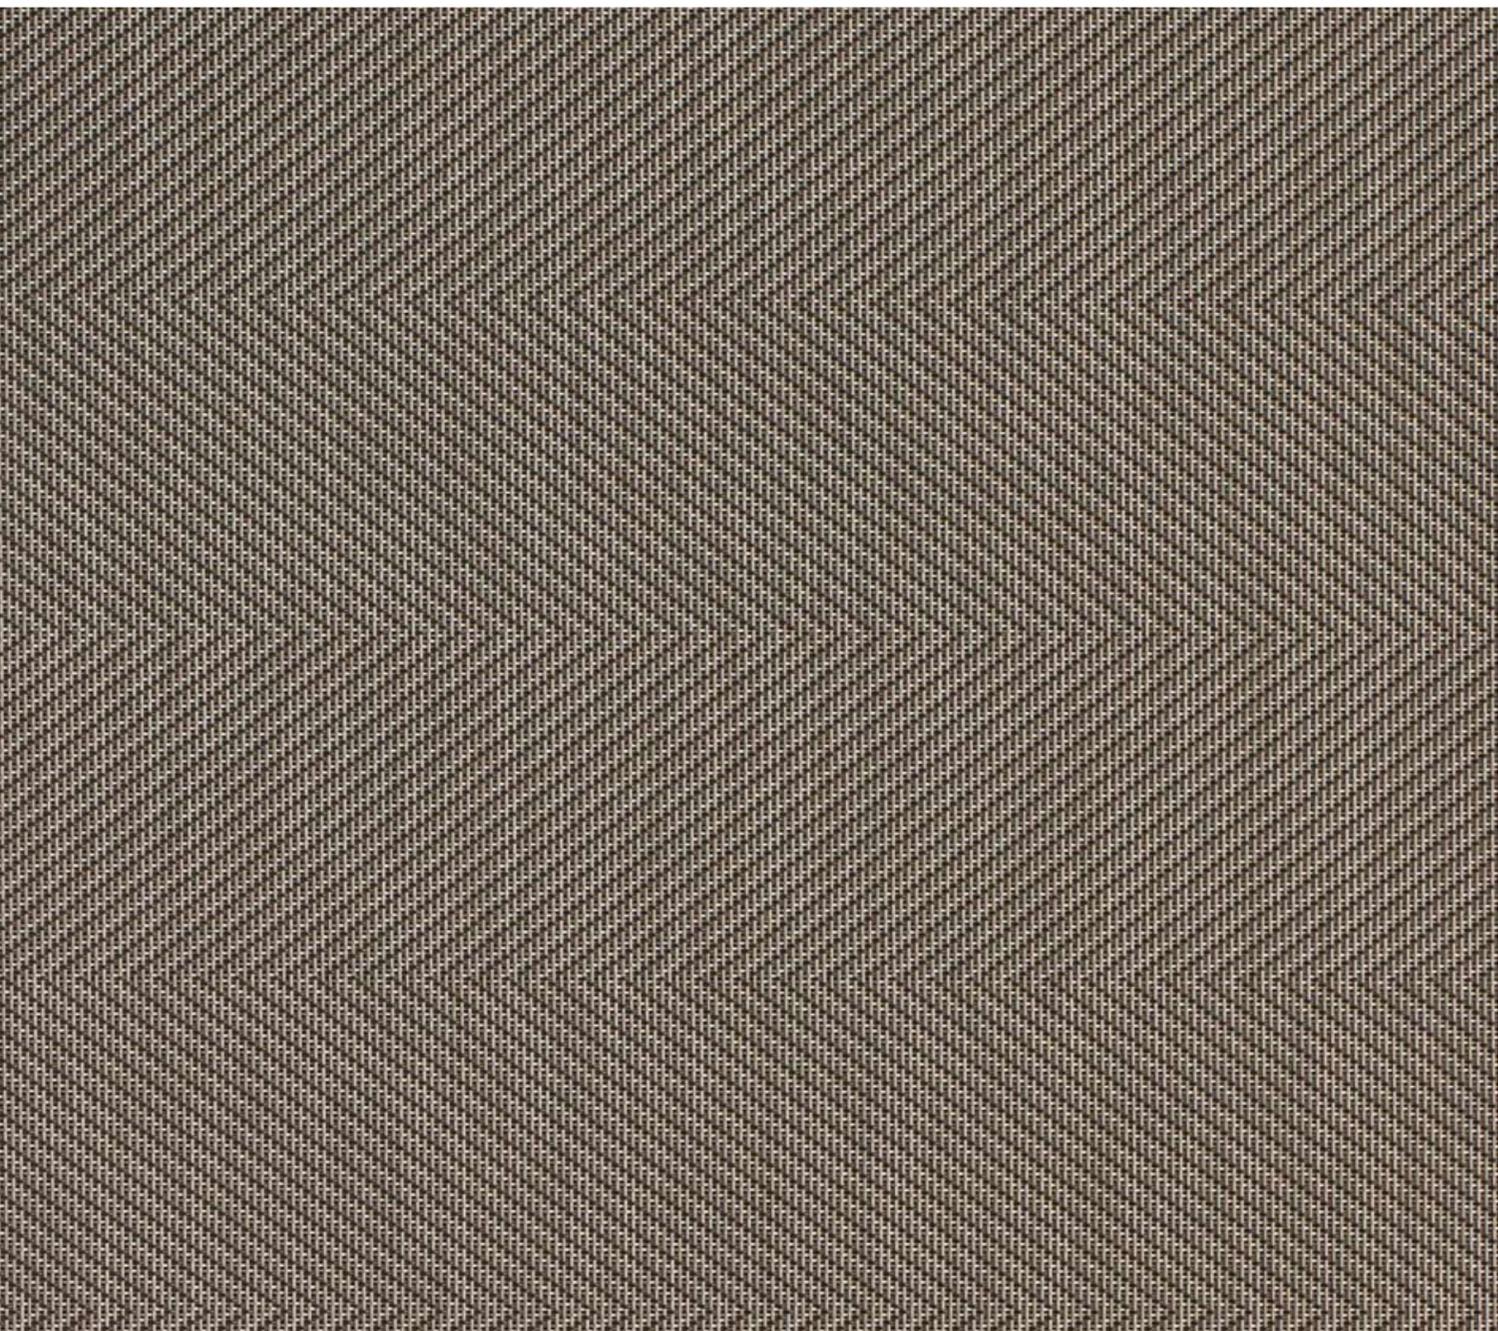


STRIPES COL 1

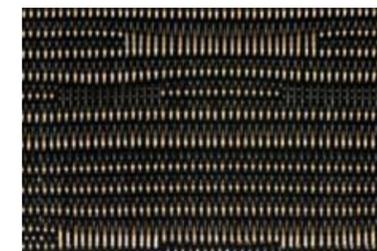

STRIPES COL 2

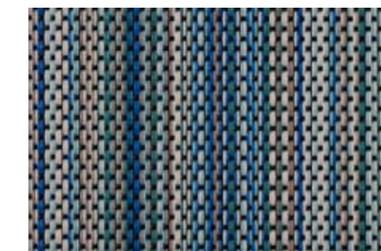

STRIPES COL 3

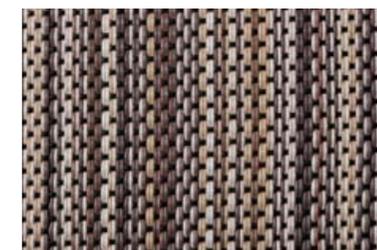

STRIPES COL 4



STRIPES COL 5




FISHBONE COL 1



FISHBONE COL 3



FISHBONE COL 2

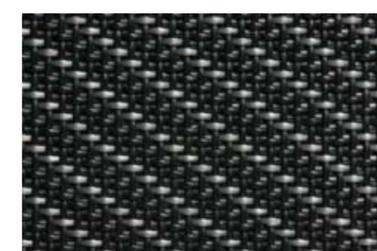

FISHBONE COL 4



PLAINS COL 1





PLAINS COL 2



PLAINS COL 3


\*Our standar collection is a selection of 33 articles available in all three qualities (surface, wallcovering, flooring) total of 99 SKU.

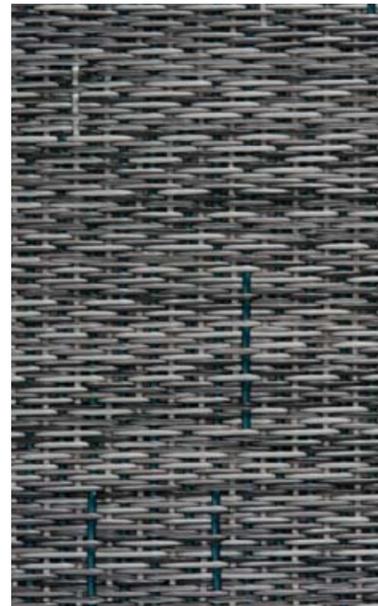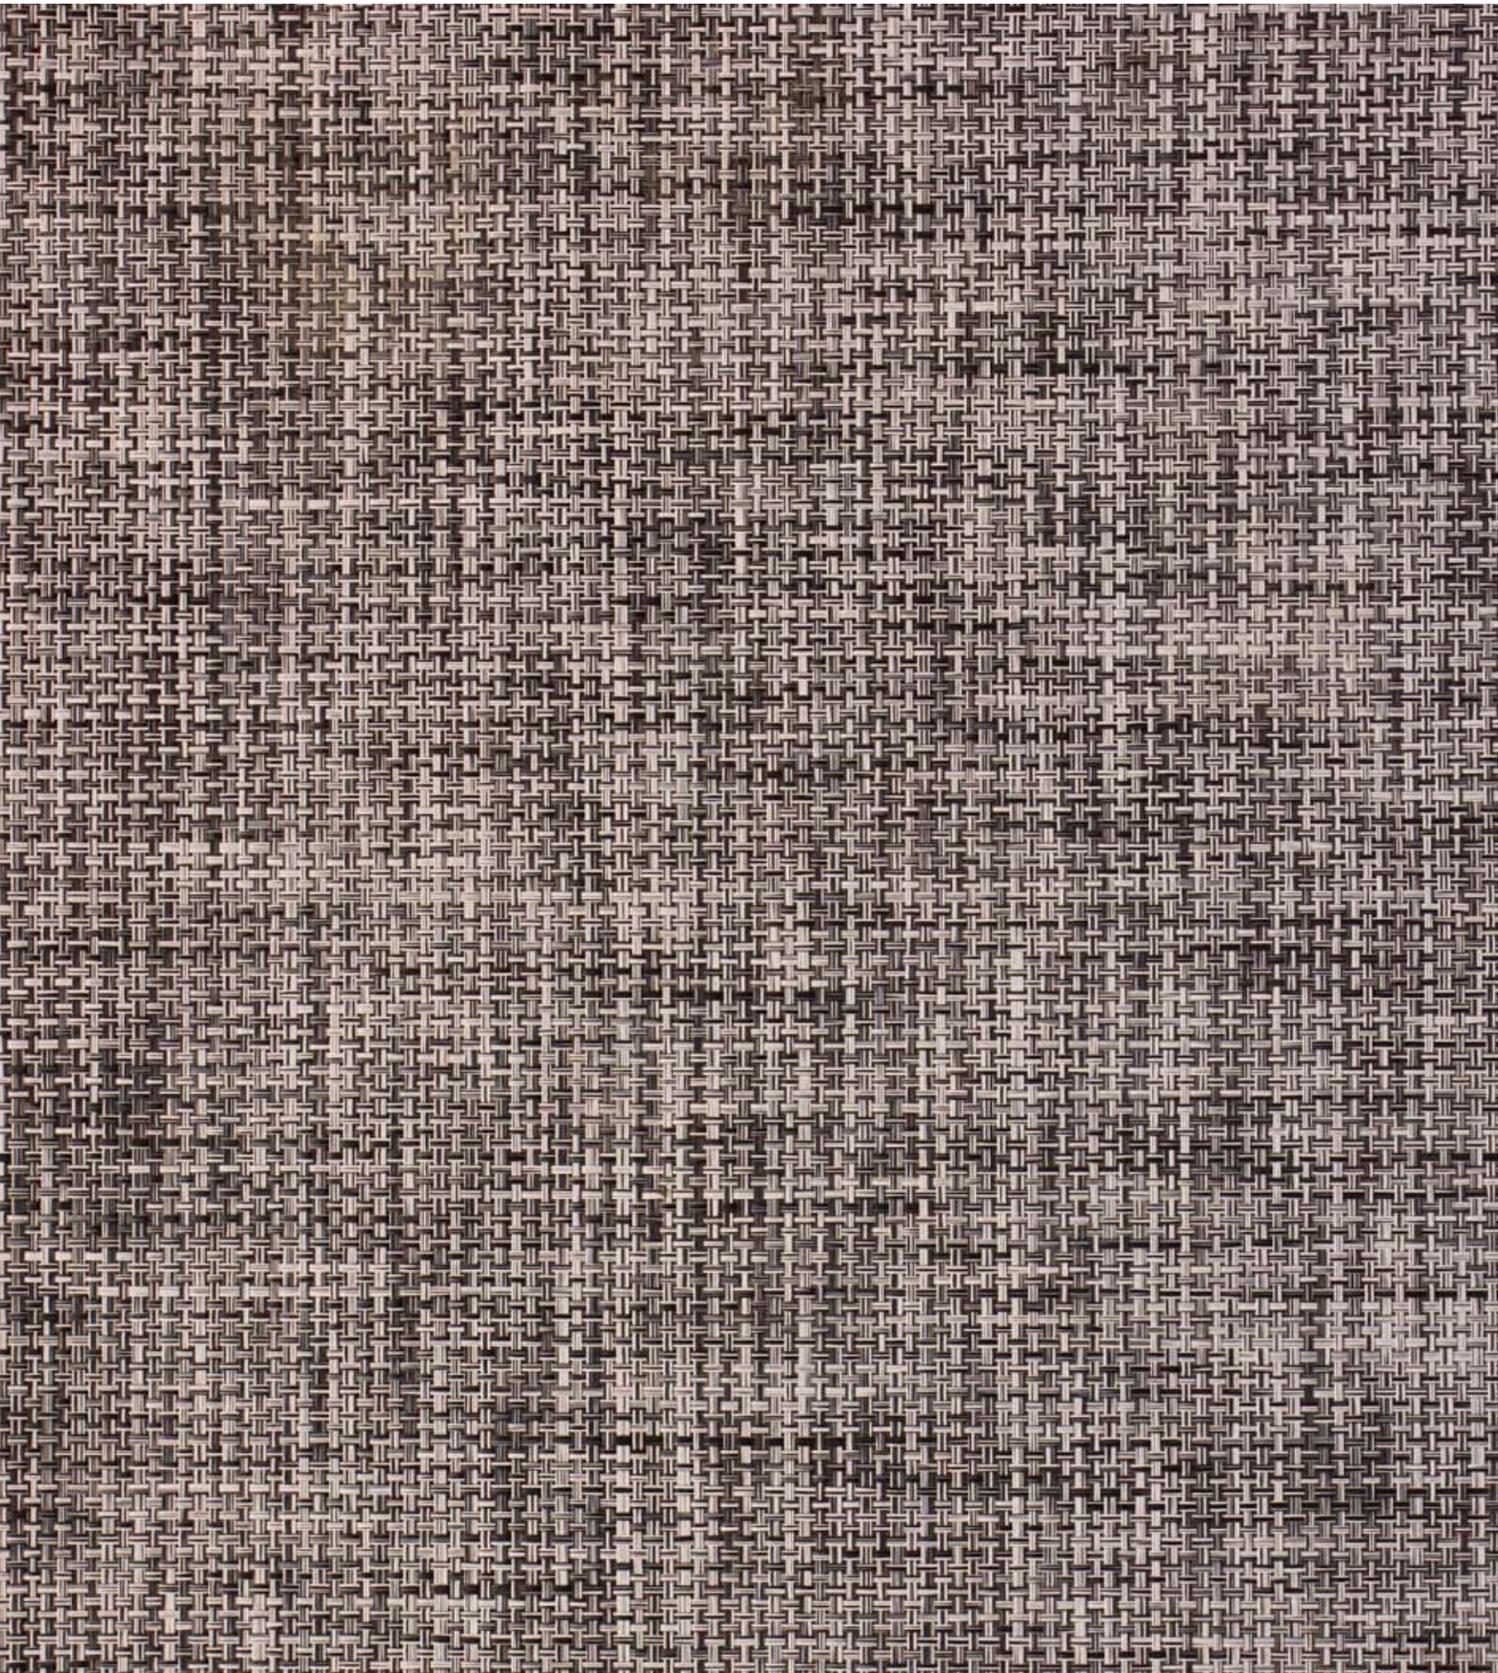

PLAINS COL 4



PLAINS COL 5

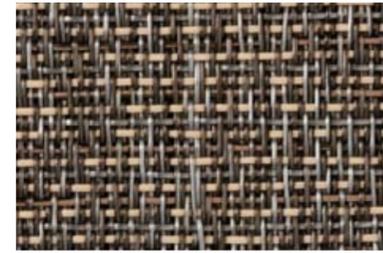


PLAINS COL 6



DESIGNS COL 1



STRUCTURES COL 1

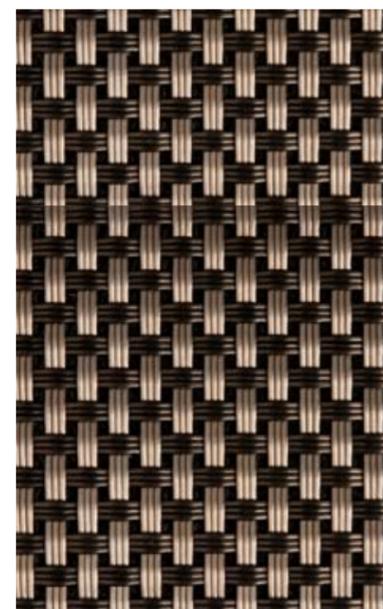

STRUCTURES COL 3



STRUCTURES COL 4




STRUCTURES COL 2



STRUCTURES COL 5



STRUCTURES COL 6

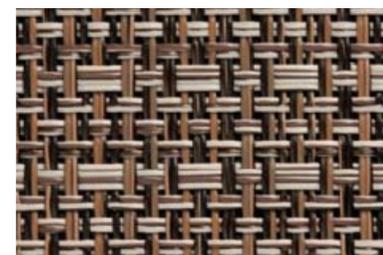

STRUCTURES COL 7



STRUCTURES COL 8


VOLUME 2




DESIGNS COL 2



DESIGNS COL 3

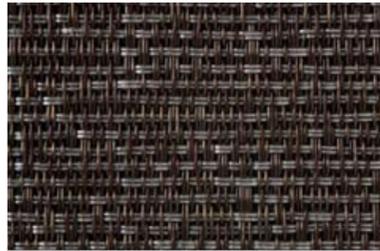


PLAINS COL 7

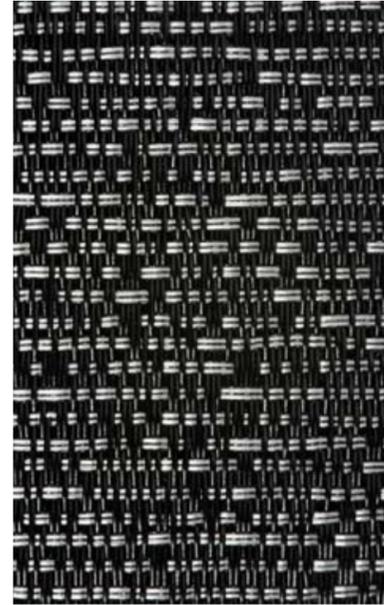


PLAINS COL 8




PLAINS COL 9

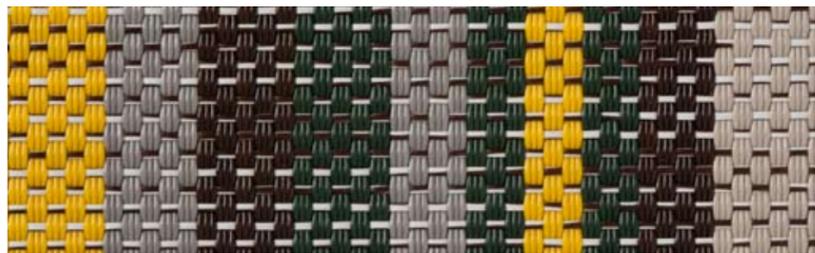

STRIPES COL 6

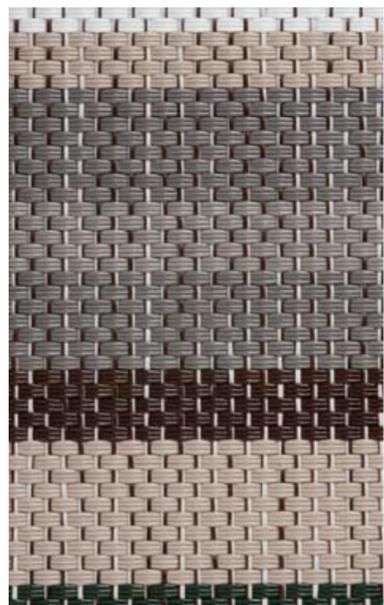

STRIPES COL 7

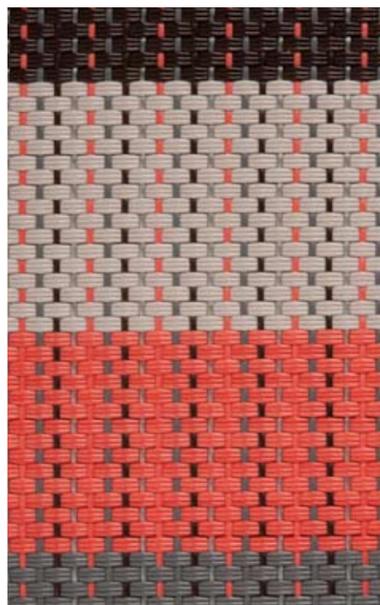


STRIPES COL 8



STRIPES COL 9





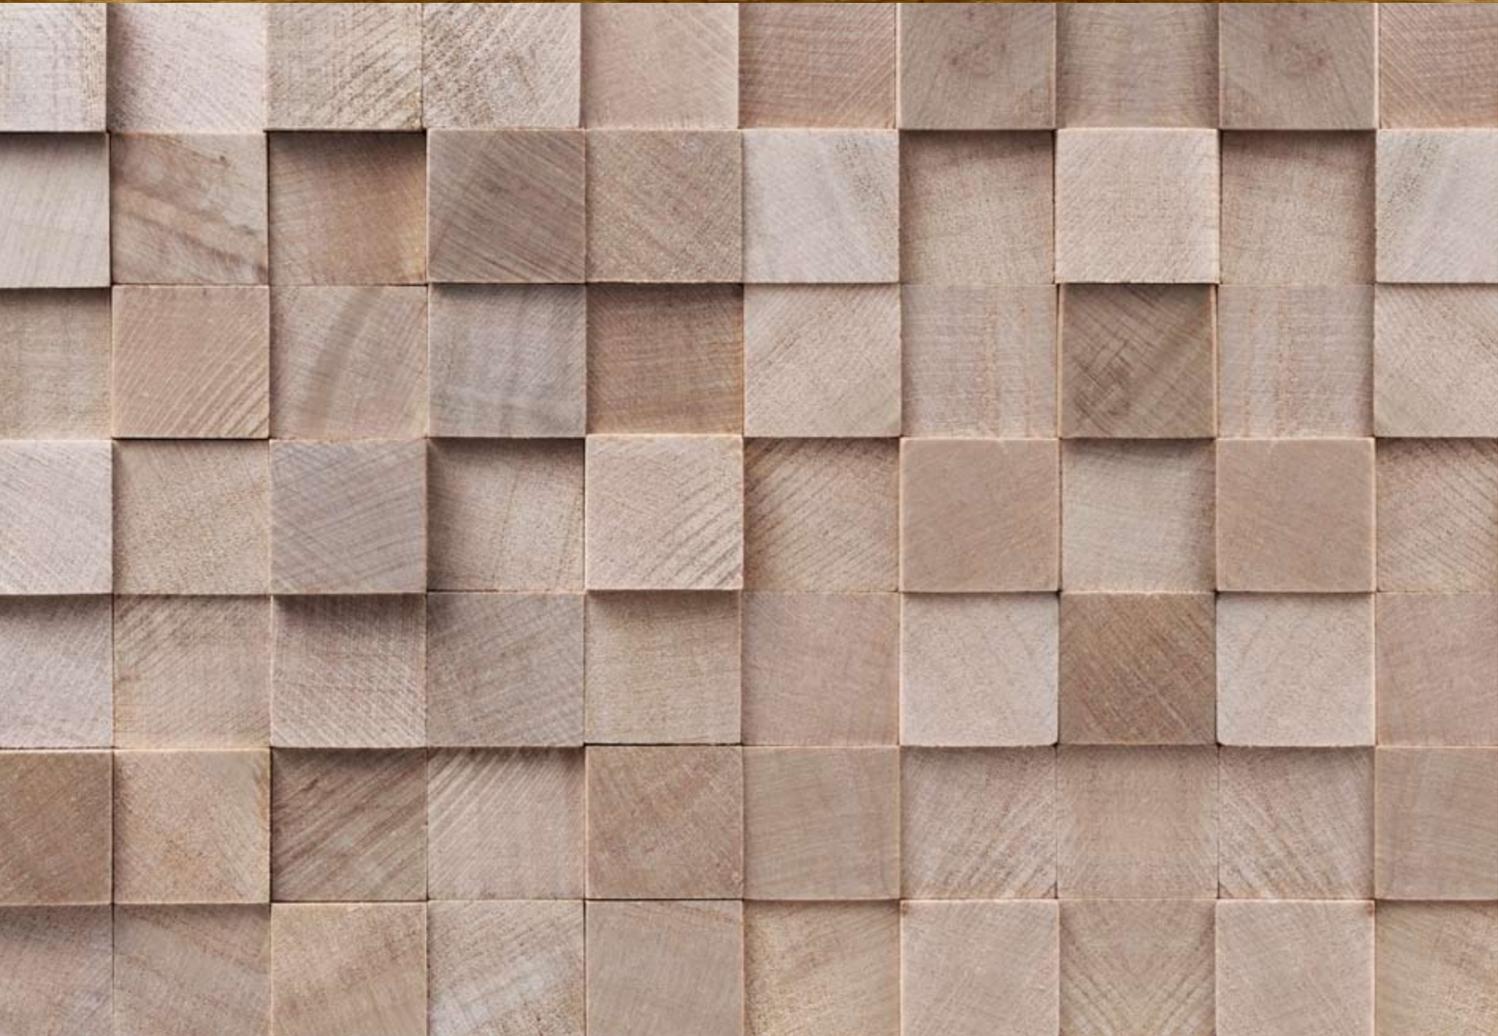

## THE *Canvas* COLLECTION

Print your dreams

Unlimited freedom in color and design! That is the power of WISE! High-tech woven vinyl flooring, wall-covering and surface, available with digital printing. Decorative and functional designs, special patterns, logos, color gradients... with WISE a new dimension in flooring, is now possible! In accordance with the standards of the highest quality and according to your specifications, with a width of 2 m. Just give us your CMYK and print your dreams!

For more options on **CANVAS COLLECTION** check on [www.wisefloor.com](http://www.wisefloor.com)



# WISE IS SAFE

## Introduction

The weave of wise will not run parallel to the cut edge, therefore any wave, bow or skew in the products is normal due to the way of woven. The tolerance for bow and skew is max 3,8 cm (1,5 width) or 5cm (2m width) in either direction. Some patterns will also exhibit a light and dark shading in the material, that is also normal. This shading is also evident at the seams where two pieces of the same style may have a different shade.

You may find some white threads going out of border, this normal occurrence, simply cut them with a scissor, it will not affect product quality and total appearance.

## Installation

**Sub floor preparation:** The floor need to be clean, no crack and oil stain free, pressure resistant and durable dry. Appropriate preparation is essential for a good result. The surface is treated with a primer, followed by the application of a leveling compound. This compound is grinded and vacuum cleaned. Take heed, depending on the construction of the floor, of the allowed residual humidity and possible rising moisture. If necessary, apply a damp screen.

**Floor preparation:** Roll the wise floor covering out, overlapping for about 5 cm and leave 24h to acclimatize. Always lay all the rolls in the same direction. Avoid crosscut seams and use transition profiles if this can not be prevented. When laying several rolls in the same room, the rolls must be the same batch. To obtain the best results, 48 acclimatization is advised and during installation the temperature should not be lower than 15 degrees Celsius and relative humidity not higher than 80%.


**Seams:** To cut the seams, trim the first carpet lane 2mm from a line or the trip of the design with a straightedge. The first lane is laid over the second lane and serves, as after matching the design, as a guide to cut the second lane and serves, after matching the design, as a guide to cut the second strip. Seams in references with an all over design can be double cut.

**Adhesive application:** The carpet is to be bonded to the entire surface using suggested glue. Certain glues cause plasticizer migration often resulting in claims; these are not covered by our warranty. Respect the handling instructions of the manufacturer or contact your supplier.

Fold the lanes back over half of their length or (width) draw a line as start for the glue application. Lay the floor in the wet glue and rub with a cork beam from the center to the edges to remove all air bubbles. It is important to seal the seams very well. During the drying time of the glue indoor conditions have to remain stable.

Welding of the seams (joints) :

**It is necessary to weld the seams**, we suggest to use a cold welding system of the Werner Mueller brand, type A.

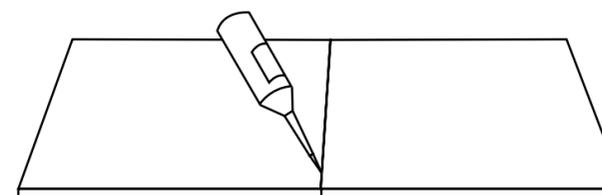

**Initial use:** It is advised not use the floor covering before the glue has hardened completely. During the drying time of the glue indoor conditions have to remain stable. It is absolutely necessary cover the floor immediately after it installation to prevent soiling and damage.

After 12 hours start initial cleaning

After 24 hours start simple traffic

After 48 hours start loading with furniture

# WISE IS FRIENDLY

## Cleaning

### Cleaning after installation

**After laying:** Construction dust (sand gypsum) is very abrasive. It should be removed to avoid the danger of creating premature walking lanes. After vacuum cleaning, the whole surface is wet cleaned with an injection extraction machine.

**For soil:** 90% of all dirt in a building comes in on footwear. For this reason, it is strongly recommended to install and maintain an entrance matting at all the entrances outdoors.

**For daily cleaning:** It depends on soiling and the traffic frequency. Stains should always be removed as soon as possible in order to avoid penetration into the floor/wall covering.

**For daily maintenance:** just wring a wet mop before using. Use clean, warm water. If you have used a cleaning agent, rinse the floor afterwards and leave the surface dry thoroughly. Alternatively, use vacuum. Preferably choose rotating brushes, neither beater bar, nor vapor cleaner. For periodic cleaning, please get help from a professional cleaning company.

Use cleaning agent only if needed.

Occasionally you can use acetone, citrus, Pine-Sol, strongly alkaline cleaning agents, scouring powder or strong solvents, but using them too often will damage the floor. Please try to use cleaning agents with PG value around 7-8. Rinse and mop with at least one additional clean water rinse after applying detergent, as detergent residue will attract soil if not properly rinsed.

## TECHNICAL INFORMATION

Construction: woven vinyl flooring, product standard EN 15114, ASTM F1303


Classification		EN 685	33 heavy commercial applications
Colour fastness to light		EN ISO EN 105-B02	>6
Fire classification		EN ISO 13501	Bfl-s1
Body voltage		ISO 6356	<2kV
Castor chair suitability		EN 985	Continuous use
Slip Resistance		EN 14041 Technical Class DS	>0,3

Dimensional stability		ISO 2551	>0.33
Impact noise reduction		EN ISO 140-8	ΔLw=22
Resistance to stains		EN 423	Rating 0 No effect (highest grade)
Thickness		EN 428	4mm
Roll length		EN 426	Average 20-30m
Roll width		EN 426	2m
Roll weight		EN 430	2kg±0.2kg per m <sup>2</sup>

WISE Flooring is suitable for castor wheeled chairs! Ensure the chairs have nylon/polyamide castors (these are standard in most models) or else an additional protective surface should be used between the flooring and the wheels.

### Important

WISE patterns are designed to simulate a hand crafted natural material. Subtle variations in colour and shading should be anticipated, as these variations are part of the manufacturing process and add to the richness and beauty of the product. If exact colour is required, please ask for a cutting from the same stock to avoid differences.

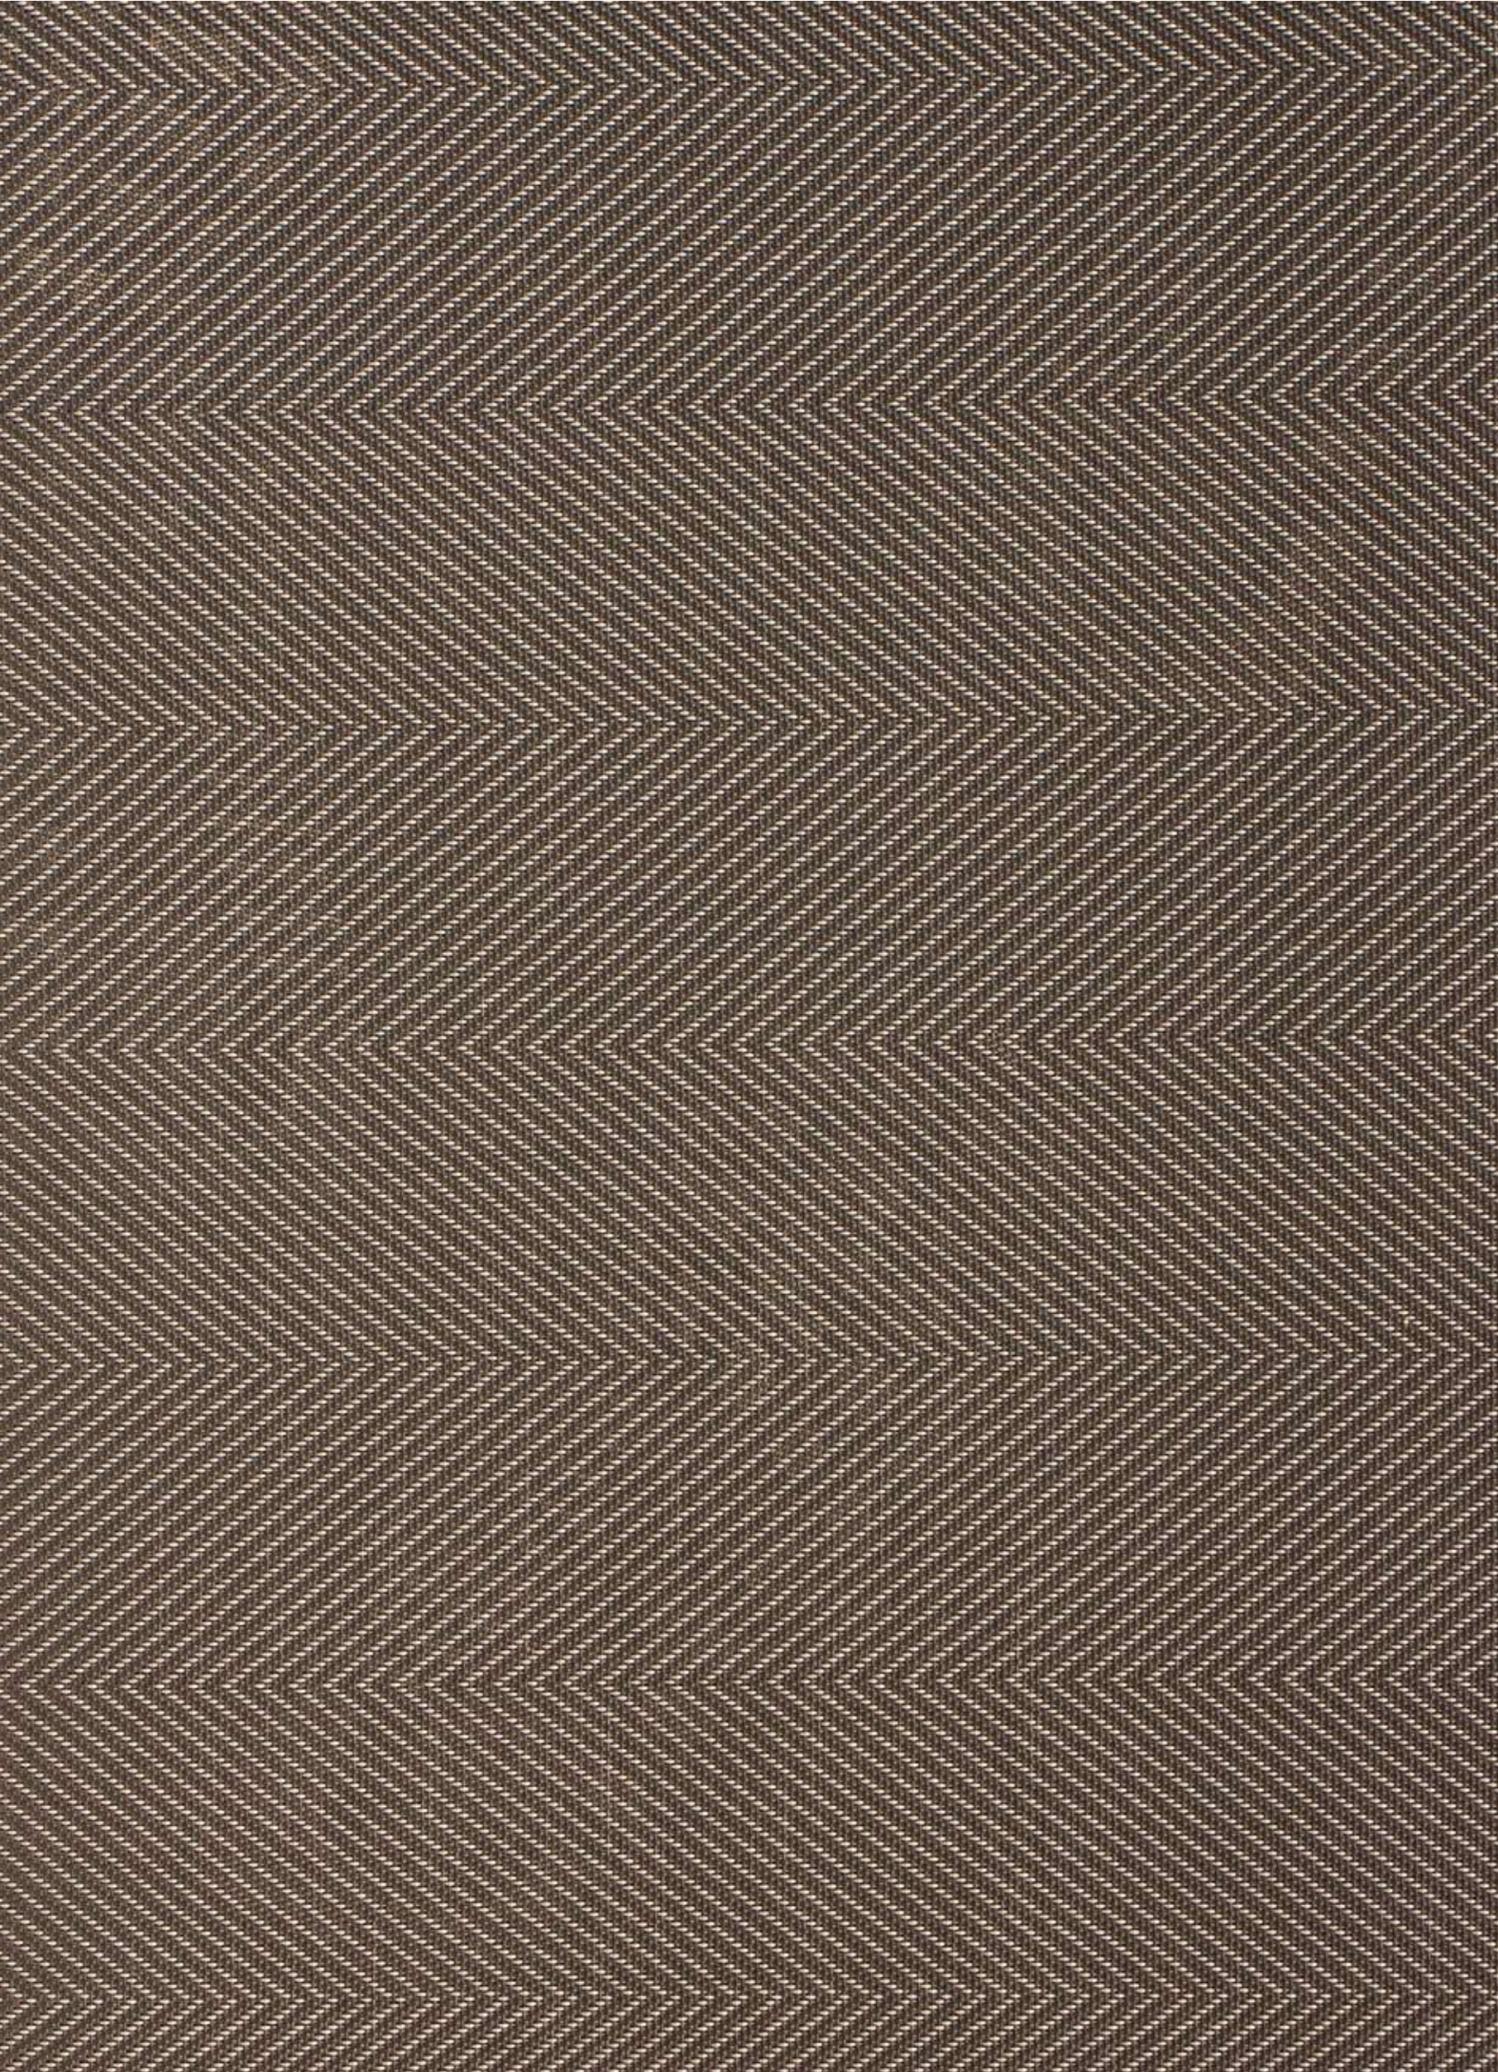



## FABULOUS WALLCOVERING

is a fresh idea that combines our innovative woven vinyl fabric with a non-woven 50gr/m<sup>2</sup> backing designed for perfect, simple and durable applications.

It's the best alternative to traditional wallpapers or vinyl wallpapers combining the aesthetic of luxury with a heavy duty, waterproof material.

Our stainless woven vinyl wallcovering can be used in rolls of 2m width or rolls of 1m width and length of 30m indoors, outdoors, in residences or in heavy commercial applications.

**Wise** wallcovering has a wide selection of 8 different structures and 33 colours.

Tailored to your own design with a minimum order of 1000 m<sup>2</sup> per design & color.

## WISE ROLLER-PANEL BLINDS

are brand new ideas to give perfect and maximum shading to your area by using our woven vinyl fabric. Great colour fastness to light, easy to clean, instant installation.

**Wise** Roller Blinds are the simplest to operate of all window treatments. Maximum shading with minimum window abrasion. Unique decelerator mechanism. Electric, chain or spring/cord operation.

The unique system of **Wise** sliding panels provides perfect interior decoration with elegance and maximum shading. Manual or electric operation.

All our mechanical and electrical components are supplied by **SOMFY** [www.somfy.com](http://www.somfy.com) and have 5 years warranty.

Wise roller-panel blinds have a wide selection of 8 different structures and 33 colours and can be customised by your measurements.



# WISE UP

WALL - WINDOW - SURFACE

## WISE SURFACE TECH SHEET

Technical specifications	Standard	
Composition	-	70% PVC + 30% PET
Weight (g/m <sup>2</sup> )	EN 430	709 +/- 5%
UV blockage	-	92%
Light fastness (Blue scale level)	-	8/8 7/8 White
Dimensional Stability	ISO 2551	< 0,3%
Odour Test	PV-3900	3 Pass
Fire Classification	type B	BS 5867:2:80
Roll size	Length: 20-30 lm	Width: 200 cm


	Ø30&35 manual only		Ø45 manual & electrical
	white beige grey		white beige grey
	white beige grey		white beige grey
	white beige grey		white beige grey
	white, beige grey, nickel mat brown, darks black		white, beige grey, nickel mat brown, darks black
	white beige grey		

Fabric can be used for outdoor blinds & tablemats  
 For more options please visit our website:  
[www.wisefloor.com](http://www.wisefloor.com)

Panel 3 ways & 5 ways available

<b>Product</b>	Woven Vinyl Wall-covering with Non-woven fabric backing
<b>Description</b>	Heavy Commercial quality vinyl with non woven fabric backing
<b>Weight</b>	650 - 750 grammes per square metre
<b>Roll Size</b>	2 m width - 25 m length
<b>Fire Rating</b>	(UK) Class 0 and 1 to BS476 part 6 and 7 when adhered to a suitable substrate. Euro classification B when adhered to suitable substrate.
<b>Hanging</b>	Exact pattern matching is vital, and the product is marked with guide lines for this purpose. The product should not be reverse hung.

The **CANVAS COLLECTION** is also available on wallcovering and surface. Check on [www.wisefloor.com](http://www.wisefloor.com)

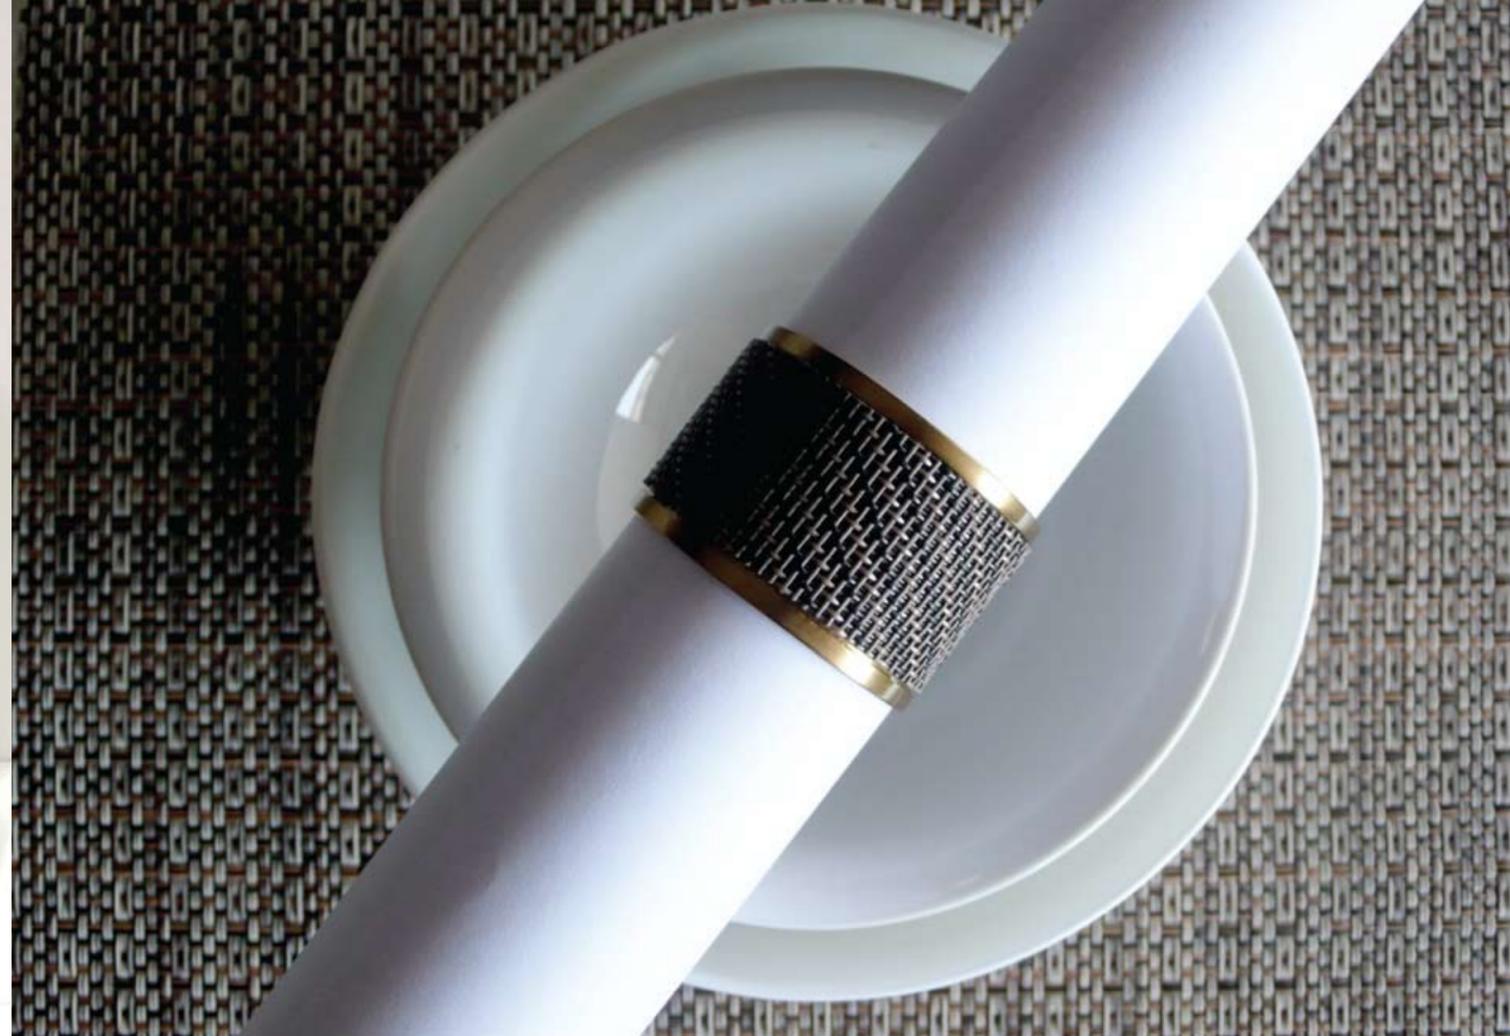

## READYMADE OPTIONS

- BAGS
- NAPKIN RINGS
- LOUNGE COASTERS
- RAGS
- TABLEMATS

.....  
For more info log on our website!  
[www.wisefloor.com](http://www.wisefloor.com)  
.....



# MAJOR PROJECTS

---

## **TURKEY**

Florence Nightingale  
Gyms  
Various Shops

## **QATAR**

Migato showroom and store

## **KUWEIT**

Caribu Coffee Shops  
Shops in Avenue Mall (phase 3)

## **INDIA**

NMIMS Institute of Management Studies  
Hilton Hotel  
Atria Hotel

## **JAPAN**

Apa Hotels

## **AUSTRALIA**

Migato showroom and store

## **MALTA**

Marina Restaurants  
Sunroute Hotels  
Sunflower Hotel  
Santana Hotel

## **HONG KONG**

Haagen Dazs

## **GREECE**

Vodafone Greece HO  
Ianos S.A. Thessaloniki  
Pomegranate Spa Hotel Chalkidiki  
Specifar Pharmaceuticals  
Airotel Athens  
Mytilinaios Group of Companies  
Neptune Hotels Kos  
Lato Boutique Hotel Heraclion Crete

## **U.A.E.**

Hilton Double Tree, Ras Al Khaimah  
Cleveland Clinic, Abu Dhabi  
Various offices and shops  
ADSSC Project (Abu Dhabi Sewerage Services Company) Abu Dhabi

## **AUSTRIA**

Fertighotel Project

## **MEXICO**

Hotel Project in Mexico City

## **JORDAN**

Bank Project (several branches)

## **SINGAPORE**

Swiss Bank Project

## **ALSO VARIOUS OFFICES, HOTELS, SHOPS AND OTHER PROJECTS IN:**

France  
Czech Republic  
Cyprus  
Slovenia  
Slovakia  
Romania  
Bulgaria  
United Kingdom  
Spain  
Portugal  
Italy  
Finland  
Colombia  
Venezuela  
Brazil  
Latin America

